

### ➤ General Description


The PAE0524AG is a 4-channel ultra low capacitance rail clamp ESD protection diodes array. Each channel consists of a pair of ESD diodes that steer positive or negative ESD current to either the positive or negative rail. A Zener diode is integrated in to the array between the positive and negative supply rails. In the typical applications, the negative rail pin (assigned as GND) is connected with system ground. The Positive ESD current is steered to the ground through an ESD diode and Zener diode and the positive ESD voltage is clamped to the Zener voltage.

The PAE0524AG is idea to protect high speed data lines. SOT-23-6L package type is provided for easy PCB layout.

### ➤ Feature


- 4 channels of ESD protection
- Provides ESD protection to IEC61000-4-2 level 4
  - ±17 KV air discharge
  - ±12 KV contact discharge
- Channel I/O to GND capacitance: 0.9pF(Max)
- Channel I/O to I/O capacitance: 0.45pF(Max)
- Low clamping voltage
- 5V low operating voltage
- Improved Zener structure
- Optimized package for easy high speed data lines PCB layout
- ROHS compliant

### ➤ SOT-23-6L

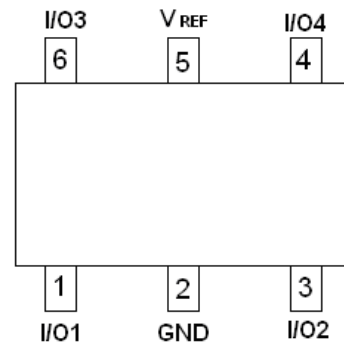

### ➤ Application

- USB 2.0 Power and Data Line Protection
- Monitors and Flat Panel Displays
- Digital Visual Interface (DVI)
- 10/100/1000 Ethernet
- Notebook Computer
- ATM Interface
- IEEE 1394 Firewire Ports
- Video Graphics Cards
- Set-top box

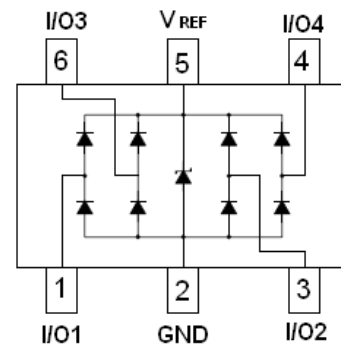

### ➤ Maximum Ratings (T<sub>A</sub>=25°C Unless otherwise specified)


Parameter	Symbol	Typical	Unit
Peak Pulse Power ( t <sub>p</sub> = 8/20 μs )	P <sub>pk</sub>	150	W
Peak Pulse Current ( t <sub>p</sub> = 8/20 μs )	I <sub>pp</sub>	5	A
ESD per IEC 61000 – 4 – 2 (Air)	V <sub>ESD1</sub>	±17	KV
ESD per IEC 61000 – 4 – 2 (Contact)	V <sub>ESD2</sub>	±12	KV
Operating Junction Temperature	T <sub>J</sub>	-55 ~ 125	°C
Storage Temperature Range	T <sub>STG</sub>	-55 ~ 150	°C

### ➤ Electrical Characteristics (T<sub>A</sub>=25°C Unless otherwise specified)


Parameter	Symbol	Conditions	Min.	Typ	Max.	Unit
Reverse Working Voltage	V <sub>RWM</sub>	Any Pin to GND			5	V
Reverse Breakdown Voltage	V <sub>BR</sub>	I <sub>t</sub> = 1mA Any Pin to GND	6			V
Reverse Leakage Current	I <sub>R</sub>	V <sub>RWM</sub> = 5V , T=25K Any Pin to GND			1	μA
Positive Clamping Voltage	V <sub>C1</sub>	I <sub>pp</sub> = 1A , t <sub>p</sub> = 8/20 μs Positive pulse Any Pin to GND		8.5	12	V
Negative Clamping Voltage	V <sub>C2</sub>	I <sub>pp</sub> = 1A , t <sub>p</sub> = 8/20 μs Negative pulse Any Pin to GND		1.8		V
Junction Capacitance Between Channel	C <sub>j1</sub>	V <sub>R</sub> = 0V , f = 1MHz Between I/O Pin		0.35	0.45	pF
Junction Capacitance Between I/O to GND	C <sub>j2</sub>	V <sub>R</sub> = 0V , f = 1MHz Any Pin to GND			0.9	pF

### ➤ Typical Characteristics


Non-Repetitive Peak Pulse Power vs. Pulse Time

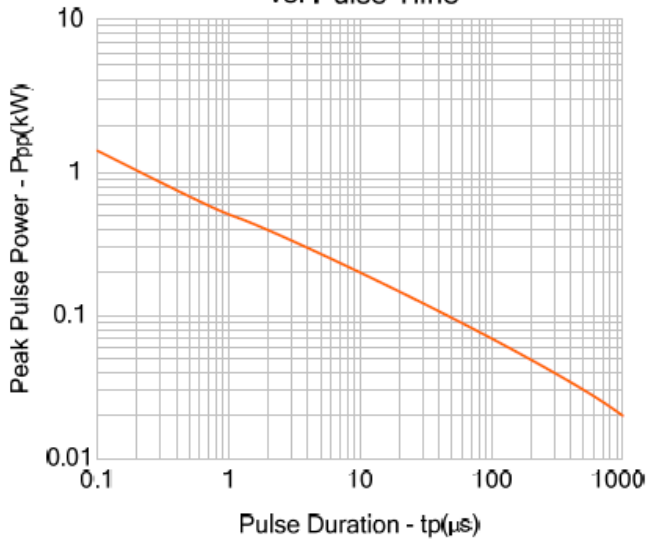


Power Derating Curve

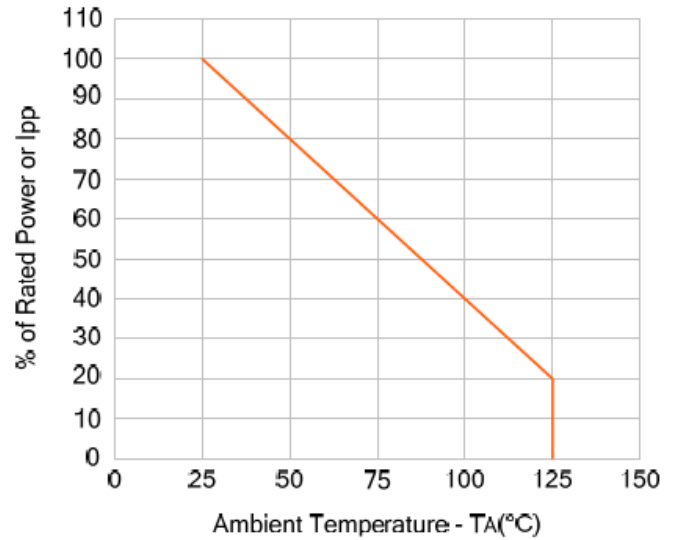





Pulse Waveform

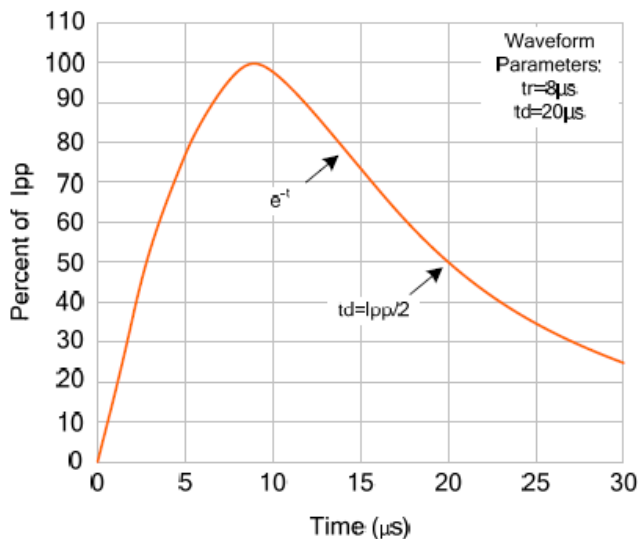


I/O-GND clamping voltage vs. peak pulse current

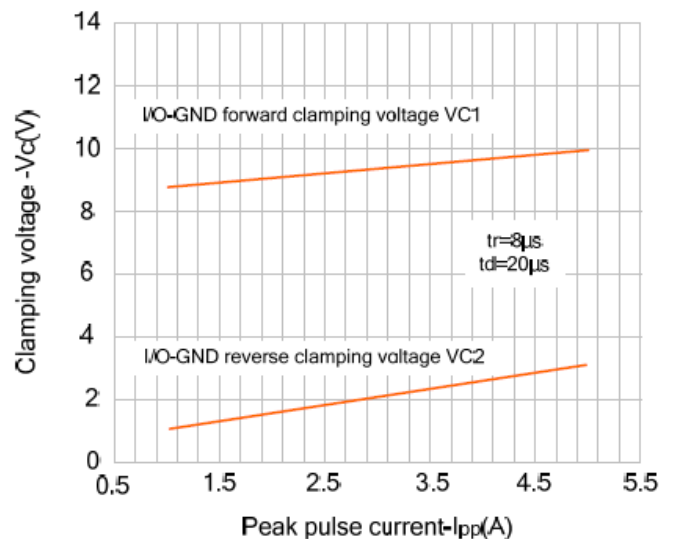

### ➤ Typical Characteristics

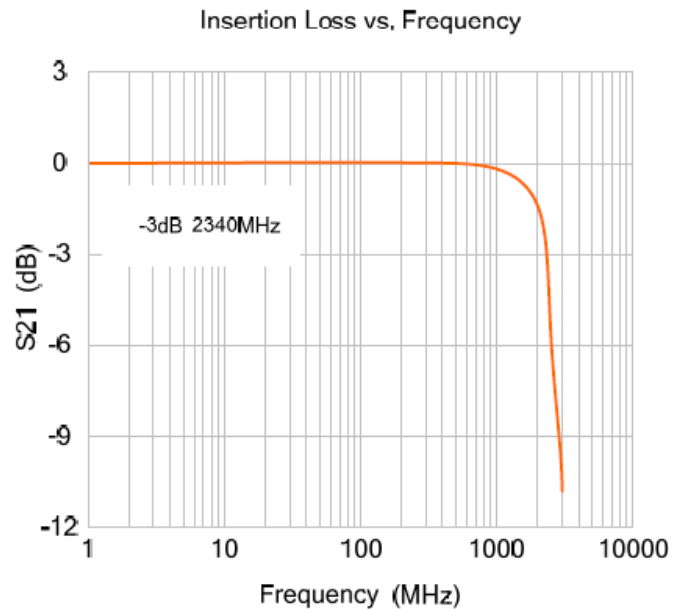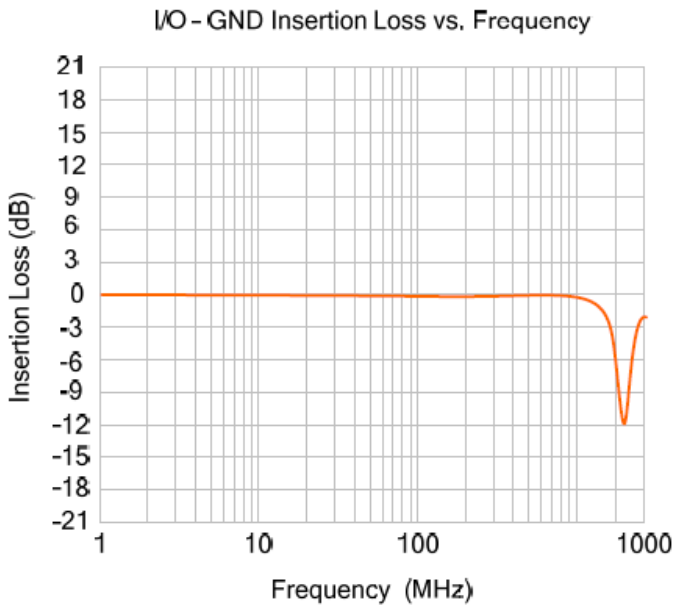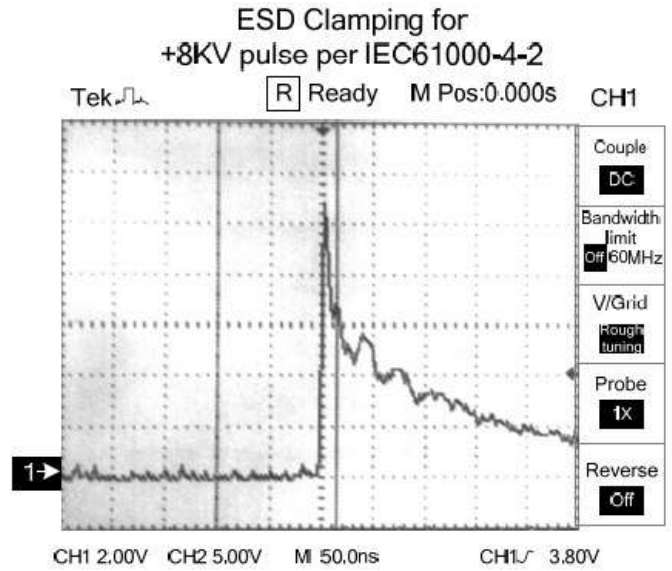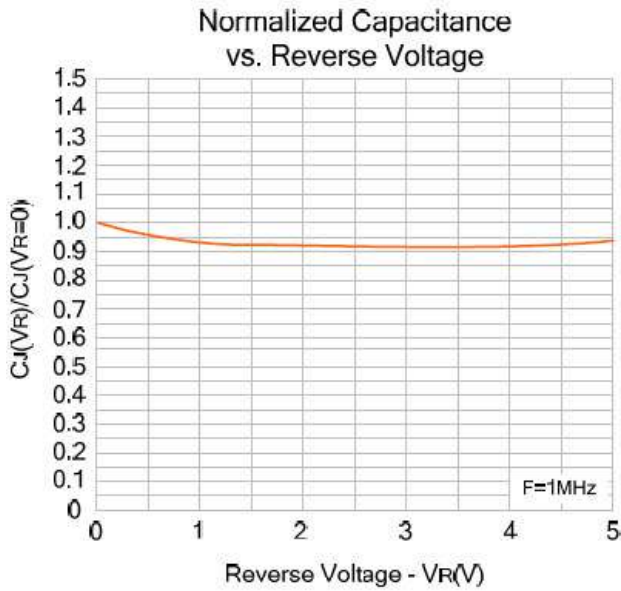

### ➤ Package Information (SOT-23-6L)

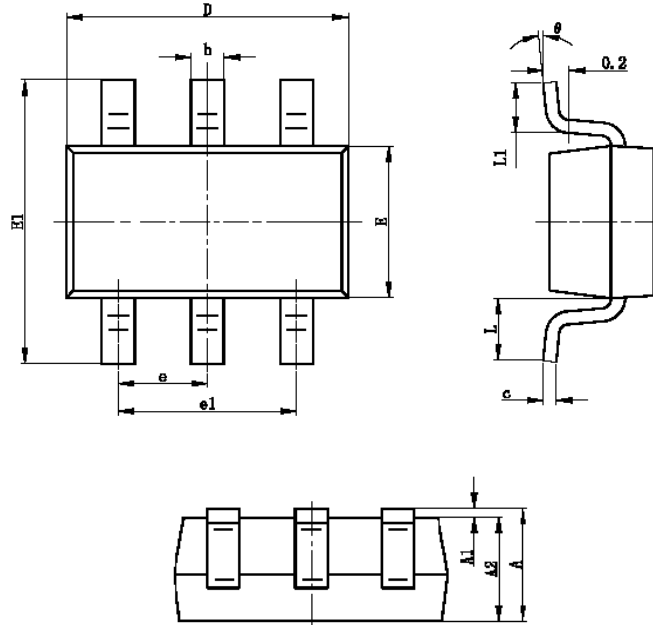

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.400	0.012	0.016
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.700REF		0.028REF	
L1	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

### ➤ Ordering Information

Part Number	Description	Quantity
PAE0524AG	SOT-23-6L Reel	3000 pcs

## **DISCLAIMER**

- The information in this document and any product described herein are subject to change without notice and should not be construed as a commitment by Paceleader, Paceleader reserve the right to make changes to the information in this document.
- Though Paceleader make effort to improve product quality and reliability, Product can malfunction and fail due to their inherent electrical sensitivity and vulnerability to physical stress, it is the responsibility of the customer, when utilizing Paceleader products, to comply with the standards of safety in making a safe design for entire system and to avoid situation in which a malfunction or failure., In developing a new designs, customer should ensure that the device which shown in this documents are used within specified operatingranges.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Paceleader for any infringements of patents or other rights of the third parties which may result from its use.