

### ➤ General Description


The PAE05VCA provides a typical line to line capacitance of 0.6pF and low insertion loss up to 3GHz providing greater signal integrity making it ideally suited for USB 2.0 applications, such as Digital TVs, DVD players, Computer, set-top boxes and MDDI applications in mobile computing devices.

It has been specifically designed to protect sensitive components which are connected to high-speed data and transmission lines from overvoltage caused by ESD(electrostatic discharge), CDE (Cable Discharge Events),and EFT (electrical fast transients).

### ➤ Feature



- Protects four I/O lines and one Vcc line
- Low capacitance
- Working voltages : 5V
- Low leakage current
- Response Time is < 1 ns
- Low capacitance (<1.2pF) for high-speed interfaces
- No insertion loss to 3.0GHz
- Solid-state silicon avalanche technology
- Meets MSL 1 Requirements
- ROHS compliant

### ➤ DFN1616-6L



### ➤ Application

- Digital Visual Interface (DVI)
- 10/100/1000 Ethernet
- USB 1.1/2.0/OTG
- IEEE 1394 Firewire Ports
- Projection TV Monitors and Flat Panel Displays
- Notebook Computers
- Set Top Box
- Projection TV

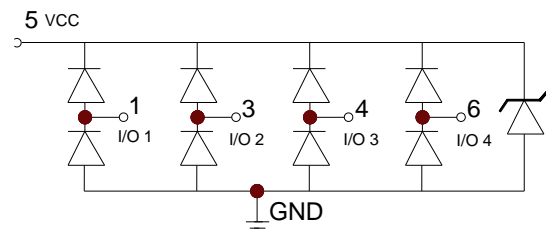

### ➤ Protection solution to meet

- IEC61000-4-2 (ESD) ±15kV (air), ±8kV (contact)
- IEC61000-4-4 (EFT) 40A (5/50ns)
- IEC61000-4-5 (Lightning) 5A (8/20µs)

### ➤ Maximum Ratings (TA=25°C Unless otherwise specified)

| Parameter                              | Symbol           | Value         | Unit  |
|--|------------------|---------------|-------|
| Peak Pulse Power (tp=8/20µs waveform)  | P <sub>PPP</sub> | 150           | Watts |
| Peak Pulse Current(tp=8/20µs waveform) | I <sub>PP</sub>  | 5             | A     |
| ESD Rating per IEC61000-4-2:           | Contact          | 8             | KV    |
|  | Air              | 15            |       |
| Lead Soldering Temperature             | T <sub>L</sub>   | 260 (10 sec.) | °C    |
| Operating Temperature Range            | T <sub>J</sub>   | -55 ~ 150     | °C    |
| Storage Temperature Range              | T <sub>STG</sub> | -55 ~ 150     | °C    |

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

\*Other voltages may be available upon request.


1. Non-repetitive current pulse, per Figure 1.

### ➤ Electrical Characteristics (TA=25°C Unless otherwise specified)


| Symbol           | Parameter                 | Conditions   | Min. | Typ. | Max. | Units |
|------------------|---------------------------|--|------|------|------|-------|
| V <sub>RWM</sub> | Reverse Working Voltage   | Any I/O to Ground  |      |      | 5.0  | V     |
| V <sub>BR</sub>  | Reverse Breakdown Voltage | I <sub>T</sub> = 1mA,<br>Any I/O to Ground                 | 6.0  |      |      | V     |
| I <sub>R</sub>   | Reverse Leakage Current   | V <sub>RWM</sub> = 5V,<br>Any I/O to Ground                |      |      | 1    | µA    |
| V <sub>F</sub>   | Diode Forward Voltage     | I <sub>F</sub> = 15mA                                      |      | 0.85 | 1.2  | V     |
| V <sub>C</sub>   | Clamping Voltage          | I <sub>PP</sub> = 1A, tp =8/20µs,<br>any I/O pin to Ground |      |      | 15.5 | V     |
|                  |                           | I <sub>PP</sub> = 5A, tp =8/20µs,<br>any I/O pin to Ground |      |      | 30   | V     |
| I <sub>PP</sub>  | Peak Pulse Current        | tp =8/20µs   |      |      | 5    | A     |
| C <sub>J</sub>   | Junction Capacitance      | V <sub>R</sub> = 0V, f = 1MHz,<br>between I/O pins         |      | 0.6  | 0.8  | pF    |
|                  |                           | V <sub>R</sub> = 0V, f = 1MHz,<br>any I/O pin to Ground    |      | 1.0  | 1.2  | pF    |

Junction capacitance is measured in V<sub>R</sub>=0V, F=1MHz


| Symbol           | Parameter                           |
|------------------|-------------------------------------|
| V <sub>RWM</sub> | Working Peak Reverse Voltage        |
| V <sub>BR</sub>  | Breakdown Voltage @ I <sub>T</sub>  |
| V <sub>C</sub>   | Clamping Voltage @ I <sub>PP</sub>  |
| I <sub>T</sub>   | Test Current                        |
| I <sub>RM</sub>  | Leakage current at V <sub>RWM</sub> |
| I <sub>PP</sub>  | Peak pulse current                  |
| C <sub>O</sub>   | Off-state Capacitance               |
| C <sub>J</sub>   | Junction Capacitance                |

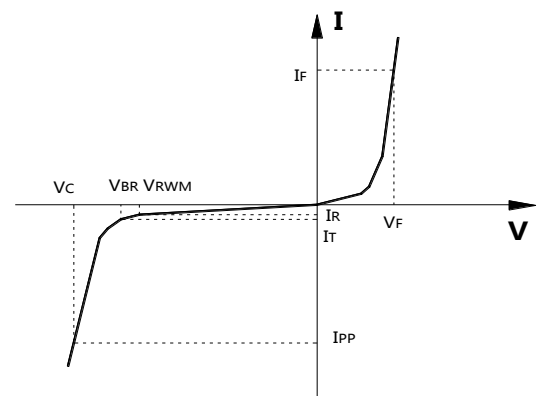


### ➤ Typical Characteristics

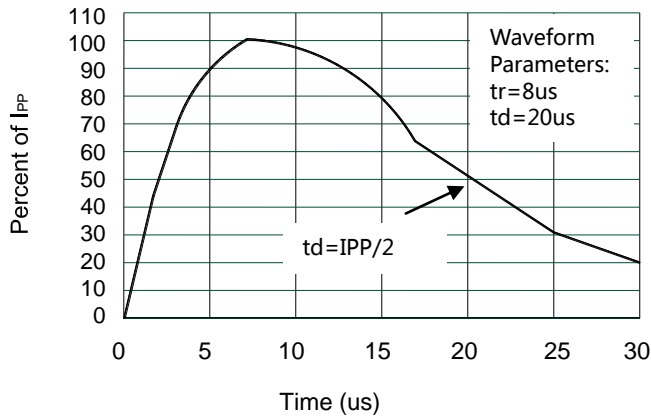


Pulse Waveform

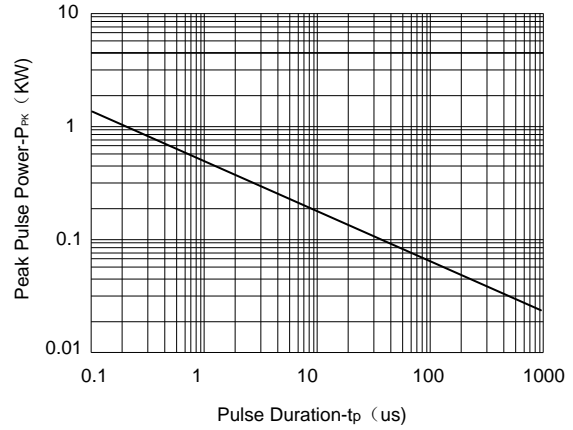

Non-Repetitive Peak Pulse Power vs. Pulse Time

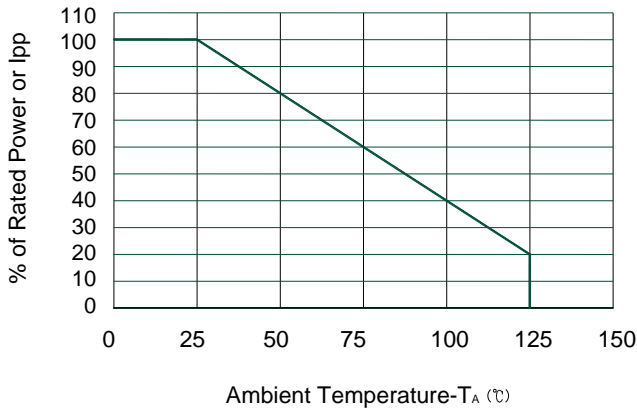

Power Derating Curve

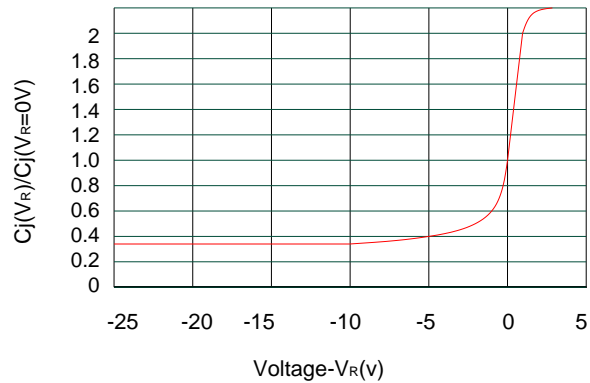


Junction Capacitance vs. Reverse Voltage

### ➤ Ordering Information

| Part Number | Description     | Quantity |
|-------------|-----------------|----------|
| PAE05VCA    | DFN1616-6L Reel | 3000 pcs |


### ➤ Typical applications

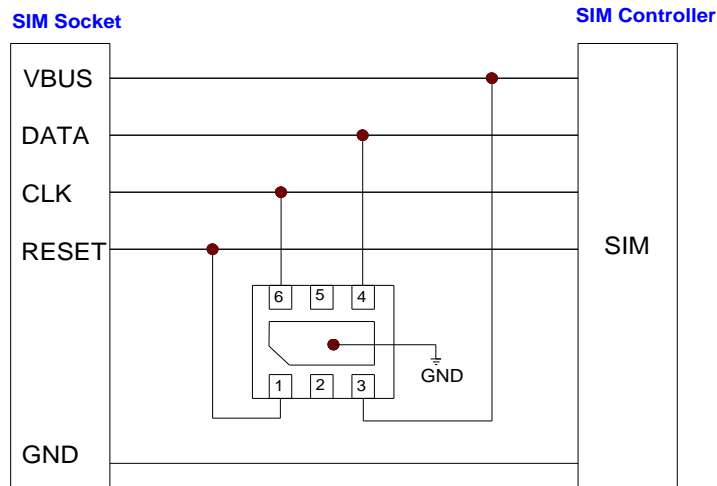

**SIM protected solution**

#### Considerations:

- The SIM (Subscriber Identification Module) card has 3 data lines that are low-speed and low-voltage
  - Given the low speed of the signals, the capacitance will not be a concern
- The low-voltage signal lines are best protected by a device which has a low standoff voltage or  $V_{RWM}$
- Protection of the 3 data lines is shown below (i.e. CLK, DATA, and RESET)

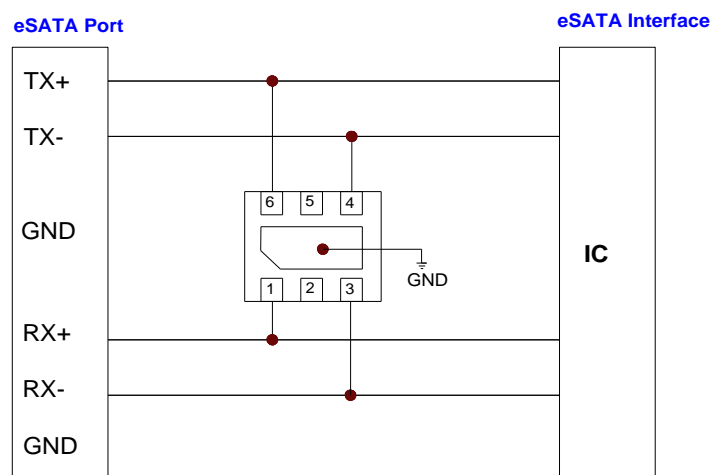

#### Considerations:


- eSATA is a subset of the SATA protocol that uses 2 differential pairs for communication
  - Four lines need to be protected per port (i.e. TX± and RX±)
  - Currently eSATA is capable of running raw data rates of 1.5Gbps (Gen 1) and 3.0Gbps (Gen 2)
- These high bus speeds require very low capacitance devices to prevent signal degradation
- To maintain the line impedance the designer should avoid using 90° angles and vias

### ➤ Package Information (DFN1616-6L)

#### Mechanical Data


Case:DFN1616-6L

Case Material: Molded Plastic. UL Flammability

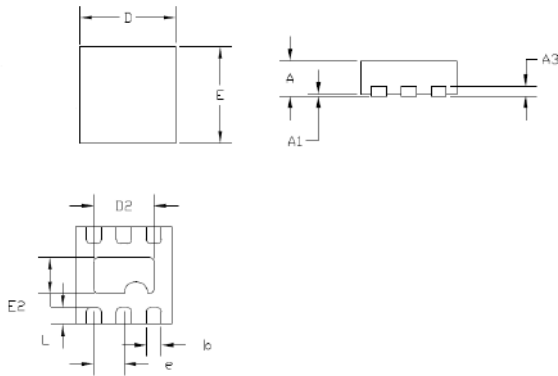


| DIM | Millimeters |       | Inches   |       |
|-----|-------------|-------|----------|-------|
|     | Min         | Max   | Min      | Max   |
| A   | 0.5         | 0.60  | 0.020    | 0.024 |
| A1  |             | 0.05  |          | 0.002 |
| A3  | 0.15REF     |       | 0.006REF |       |
| b   | 0.20        | 0.30  | 0.008    | 0.012 |
| D   | 1.55        | 1.65  | 0.061    | 0.065 |
| E   | 1.55        | 1.65  | 0.061    | 0.065 |
| E2  | 0.50        | 0.7   | 0.020    | 0.027 |
| D2  | 0.90        | 1.10  | 0.035    | 0.043 |
| e   | 0.50BSC     |       | 0.020BSC |       |
| L   | 0.164       | 0.316 | 0.006    | 0.012 |

#### Recommended Pad outline

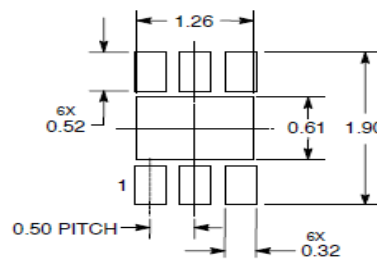

#### DFN1616-6L Reel Dim

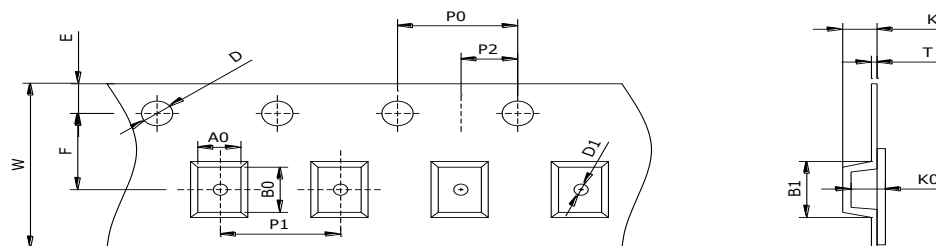

| Package    | Chip Size (mm) | Pocket Size B0×A0×K0(mm) | Tape Width | Reel Diameter | Quantity Per Reel | P0  | P1  |
|------------|----------------|--------------------------|------------|---------------|-------------------|-----|-----|
| DFN1616-6L | 1.6×1.6×0.60   | 1.75×1.75×0.75           | 8mm        | 178mm(7")     | 3000              | 4mm | 4mm |
| D0         | D1             | E                        | F          | K             | T                 | W   |     |
| 1.5mm      | 0.5mm          | 1.75mm                   | 3.5mm      | 0.50mm        | 0.2mm             | 8mm |     |

## **DISCLAIMER**

- The information in this document and any product described herein are subject to change without notice and should not be construed as a commitment by Paceleader, Paceleader reserve the right to make changes to the information in this document.
- Though Paceleader make effort to improve product quality and reliability, Product can malfunction and fail due to their inherent electrical sensitivity and vulnerability to physical stress, it is the responsibility of the customer, when utilizing Paceleader products, to comply with the standards of safety in making a safe design for entire system and to avoid situation in which a malfunction or failure., In developing a new designs, customer should ensure that the device which shown in this documents are used within specified operatingranges.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Paceleader for any infringements of patents or other rights of the third parties which may result from its use.