


➤ General Description

This PAN7002WR N-Channel enhancement mode power field effect transistor is the high density trench technology and this advanced technology can provide excellent $R_{ds(On)}$ performance and efficiency for power switching and load switching application., this device also comply with the RoHS and Green Product requirement with full function reliability approved.

➤ Feature

- High density cell design for low $R_{DS(ON)}$
- Voltage controlled small signal switch
- Rugged and reliable
- High saturation current capability
- SOT-323 package design

➤ SOT-323

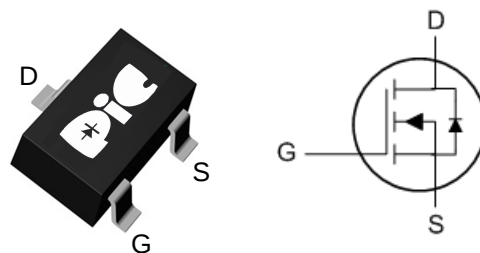

➤ Application

- Load Switch for Portable Devices
- DC/DC Converter

➤ Maximum Ratings ($T_A=25^{\circ}C$ Unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	20	V
Continuous Drain Current	I_D	0.115	A
Power Dissipation	P_D	0.200	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	625	$^{\circ}C/W$
Junction Temperature	T_J	150	$^{\circ}C$
Storage Temperature	T_{stg}	-50 ~+150	

➤ Electrical Characteristics ($T_A=25^\circ C$ Unless otherwise specified)






Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=0V$, $I_D=250\mu A$	60			V
Gate-Threshold Voltage	$V_{(GS)th}$	$V_{DS}=V_{GS}$, $I_D=250\mu A$	1	1.6	2.5	
Gate-body Leakage	I_{GSS}	$V_{DS}=0V$, $V_{GS}=\pm 20V$			± 80	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=60V$, $V_{GS}=0V$			80	nA
On-state Drain Current	$I_{D(on)}$	$V_{GS}=10V$, $V_{DS}=7V$	500			mA
Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$, $I_D=500mA$		0.9	5	Ω
		$V_{GS}=5V$, $I_D=50mA$		1.1	7	
Forward Trans conductance	g_{fs}	$V_{DS}=10V$, $I_D=200mA$	80			ms
Drain-source on-voltage	$V_{DS(on)}$	$V_{GS}=10V$, $I_D=500mA$			3.75	V
		$V_{GS}=5V$, $I_D=50mA$			0.375	V
Diode Forward Voltage	V_{SD}	$I_S=115mA$, $V_{GS}=0V$	0.55		1.2	V
Input Capacitance *	C_{iss}	$V_{DS}=25V$, $V_{GS}=0V$, $f=1MHz$			50	pF
Output Capacitance *	C_{oss}				25	
Reverse Transfer Capacitance *	C_{rss}				5	

SWITCHING TIME


Turn-on Time*	$t_{d(on)}$	$V_{DD}=25V$, $R_L=50\Omega$, $I_D=500mA$, $V_{GEN}=10V$ $R_G=25\Omega$			20	ns
Turn-off Time*	$t_{d(off)}$				40	

*These parameters have no way to verify.

➤ Typical Characteristics

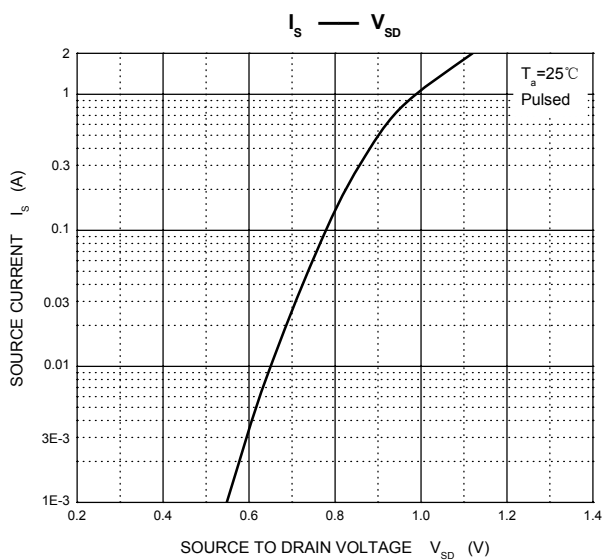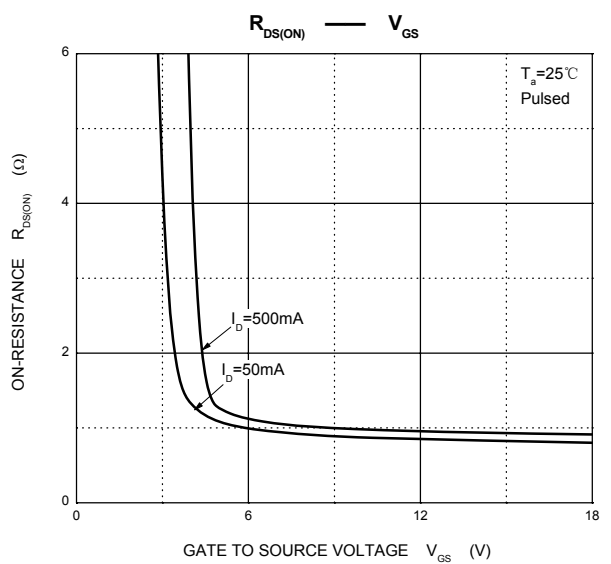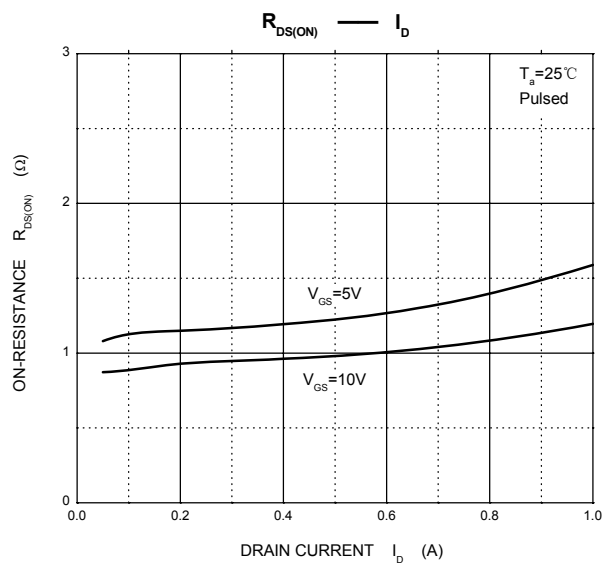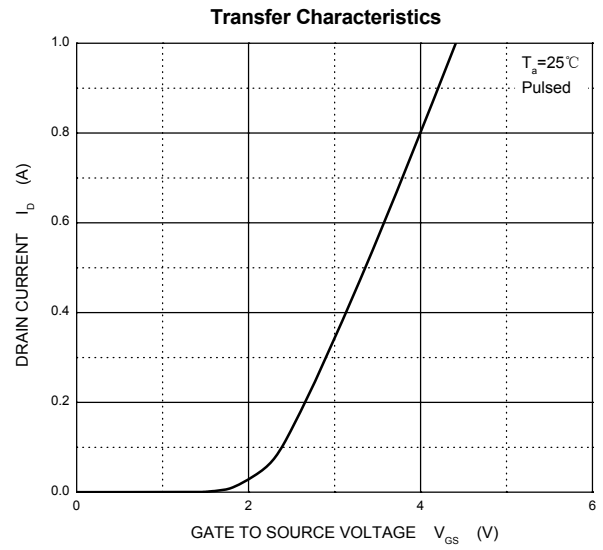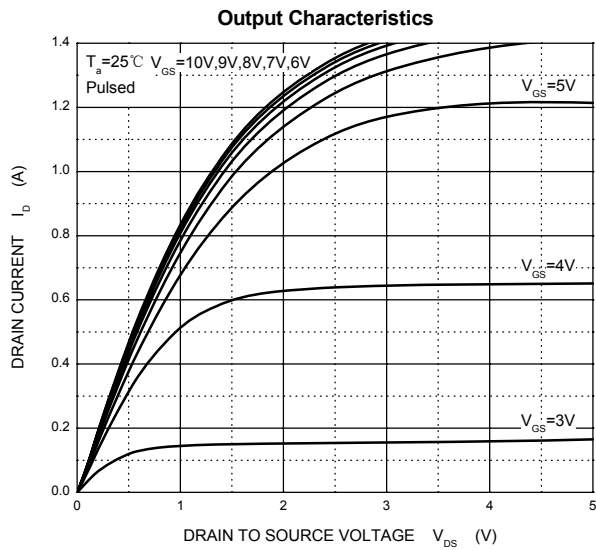

➤ Recommend IR Reflow Soldering Thermal Profile



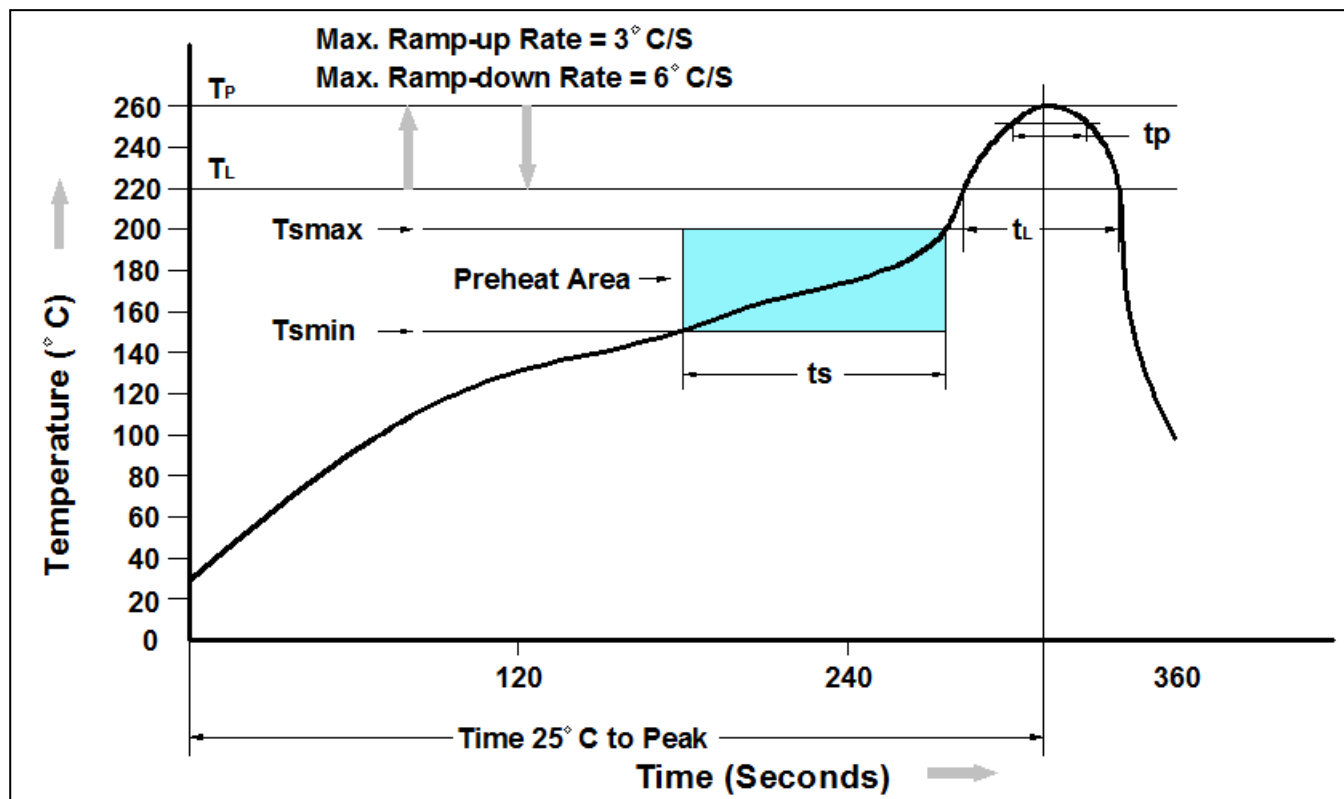


Profile Feature	Pb-Free Assembly Profile
Temperature Min. (T_{Smin})	150°C
Temperature Max. (T_{Smax})	200°C
Time (t_S) from (T_{Smin} to T_{Smax})	60-120 seconds
Average Ramp-up Rate (t_L to t_P)	3°C/second max.
Liquidous Temperature (T_L)	217°C
Time (t_L) Maintained Above (T_L)	60 – 150 seconds
Peak Temperature	260°C +0°C / -5°C
Time (t_P) within 5°C of actual Peak Temperature	30 seconds
Ramp-down Rate (T_P to T_L)	6°C/second max
Time 25°C to Peak Temperature	8 minutes max.

➤ Ordering Information

Part Number	Description	Quantity
PAN7002WR	SOT-323 Reel	3000 pcs

➤ Package Information (SOT-323)

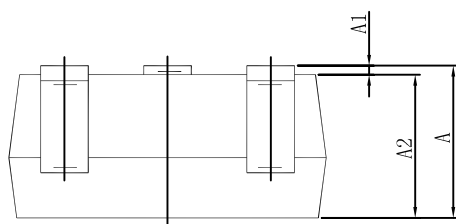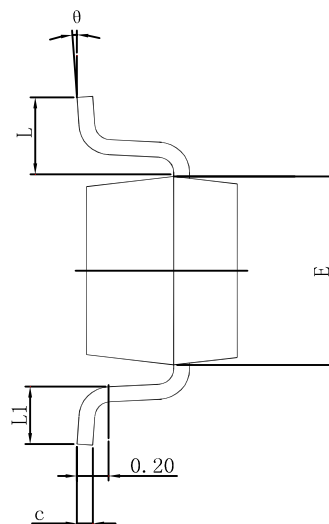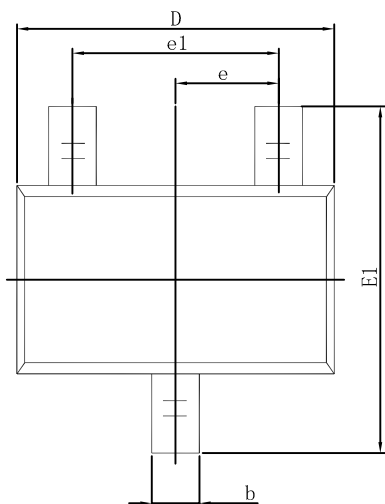

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650 TYP.		0.026 TYP.	
e1	1.200	1.400	0.047	0.055
L	0.525 REF.		0.021 REF.	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

DISCLAIMER

- The information in this document and any product described herein are subject to change without notice and should not be construed as a commitment by Paceleader, Paceleader reserve the right to make changes to the information in this document.
- Though Paceleader make effort to improve product quality and reliability, Product can malfunction and fail due to their inherent electrical sensitivity and vulnerability to physical stress, it is the responsibility of the customer, when utilizing Paceleader products, to comply with the standards of safety in making a safe design for entire system and to avoid situation in which a malfunction or failure., In developing a new designs, customer should ensure that the device which shown in this documents are used within specified operating ranges.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Paceleader for any infringements of patents or other rights of the third parties which may result from its use.