

➤ General Description



The PAE0531EU is designed with latest Punch-Through process TVS technology to protect voltage sensitive components from ESD. Excellent clamping capability, low leakage, and fast response time provide best in class protection on designs that are exposed to ESD. Because of its small size, it is suited for use in cellular phones, MP3 players, digital cameras and many other portable applications where board space comes at a premium. because of its low capacitance, it is suited for use in high frequency designs such as USB 2.0 high speed, USB 3.0 super speed, VGA, DVI, HDMI, eSATA and other high speed line applications.

It has been specifically designed to protect sensitive components which are connected to data and transmission lines from overvoltage caused by ESD(electrostatic discharge), and EFT (electrical fast transients).

➤ Feature

- Peak Power Dissipation – 80 W (8 x 20 us Waveform)
- Stand-off Voltage: 5.0 V
- Low capacitance (<0.35pF) for high-speed interfaces
- No insertion loss to 3.0GHz
- Replacement for MLV (0402)
- Protects I/O Port
- Low Clamping Voltage
- Low Leakage
- Low Capacitance
- Meets MSL 1 Requirements
- ROHS compliant
- Solid-state Punch-Through TVS Process technology

➤ DFN-1006

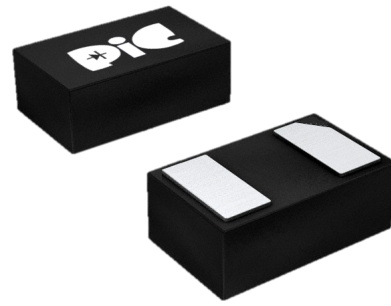

➤ Application

- High Speed Line :USB1.0/2.0/3.0/3.1, VGA, DVI, SDI,
- High Definition Multi-Media Interface (HDMI1.3/1.4/2.0)
- Serial and Parallel Ports
- Notebooks, Desktops, Servers
- Projection TV
- Cellular handsets and accessories
- Portable instrumentation
- Peripherals

➤ Protection solution to meet

- IEC61000-4-2 (ESD) ±20kV (air), ±20kV (contact)

➤ Maximum Ratings (TA=25°C Unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (tp=8/20µs waveform)	P _{PPP}	80	Watts
ESD Rating per IEC61000-4-2:	Contact	20	KV
	Air	20	
Lead Soldering Temperature	T _L	260 (10 sec.)	°C
Operating Temperature Range	T _J	-55 ~ 150	°C
Storage Temperature Range	T _{STG}	-55 ~ 150	°C
Lead Solder Temperature – Maximum (10 Second Duration)	T _L	260	°C

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

*Other voltages may be available upon request.


1. Non-repetitive current pulse, per Figure 1.

➤ Electrical Characteristics (TA=25°C Unless otherwise specified)


Device	V _{RWM} (V)	I _R @ V _{RWM} (µA)	V _{PT} @ 1 mA (Volts)		R _{dyn} Ω Typ.	V _C @ 2 A (V)	Capacitance @ V _R = 0 V, 1 MHz (pF)	
			Min	Max			Typ	Max
			PAE0531EU	5.0				

Junction capacitance is measured in VR=0V,F=1MHz


Symbol	Parameter
V _{RWM}	Working Peak Reverse Voltage
V _{PT}	Punch-Through Voltage@ I _{PT}
V _{SB}	Snap-Back Voltage@ I _{SB}
V _C	Clamping Voltage @ I _{PP}
I _T	Test Current
I _{RM}	Leakage current at V _{RWM}
I _{PP}	Peak pulse current
C _O	Off-state Capacitance
C _J	Junction Capacitance

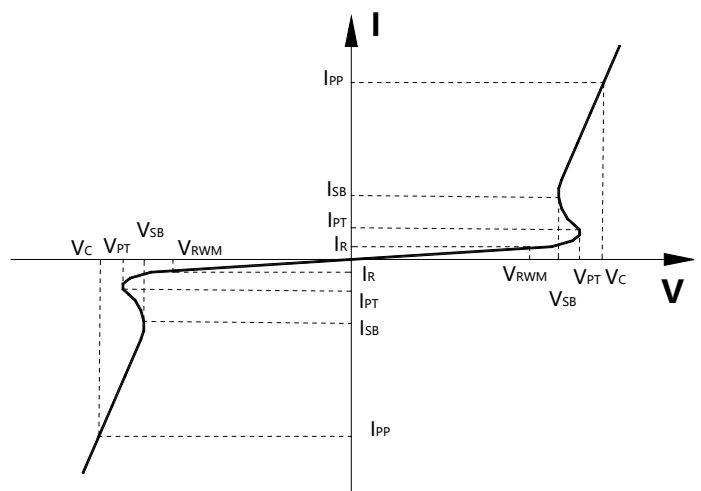


➤ Typical Characteristics

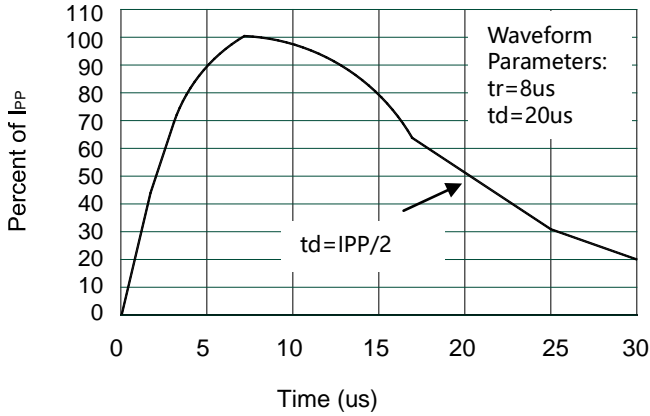


Pulse Waveform

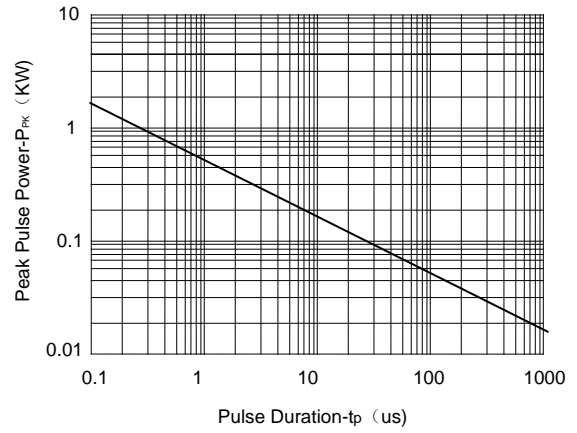

Non-Repetitive Peak Pulse Power vs. Pulse Time

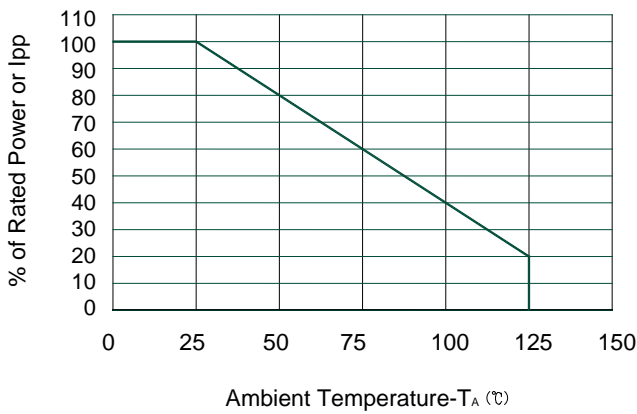


Power Derating Curve

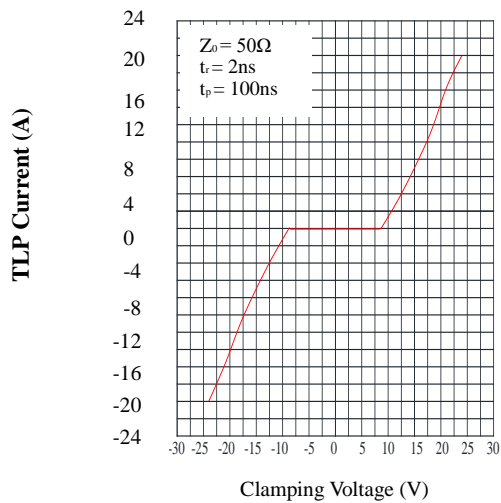

TLP Measurement


➤ Package Information (DFN1006)

Case Material: Molded Plastic. UL Flammability

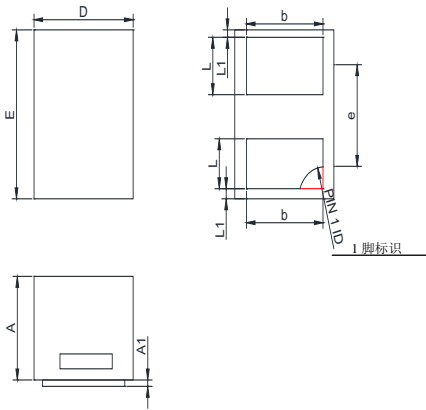


DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	0.30	0.50	0.012	0.020
A1	0.00	0.05	0.000	0.002
D	0.55	0.65	0.022	0.026
E	0.95	1.05	0.037	0.041
b	0.25	0.60	0.010	0.024
e	0.65TYP		0.026TYP	
L	0.15	0.35	0.006	0.014
L1	0.05REF		0.002REF	

Recommended Pad outline



DFN1006 Reel Dim

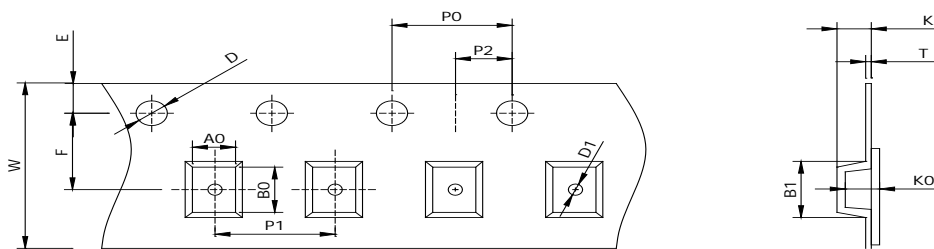

Package	Chip Size (mm)	Pocket Size B0×A0×K0(mm)	Tape Width	Reel Diameter	Quantity Per Reel	P0	P1
DFN1006	1.0×0.6×0.50	1.10×0.70×0.60	8mm	178mm(7")	5000/10000	4mm	4/2mm
D0	D1	E	F	K	T	W	
1.5mm	0.5mm	1.75mm	3.5mm	0.55mm	0.2mm	8mm	

➤ Ordering Information

Part Number	Description	Quantity
PAE0531EU	DFN1006 Reel	10000 pcs

DISCLAIMER

- The information in this document and any product described herein are subject to change without notice and should not be construed as a commitment by Paceleader, Paceleader reserve the right to make changes to the information in this document.
- Though Paceleader make effort to improve product quality and reliability, Product can malfunction and fail due to their inherent electrical sensitivity and vulnerability to physical stress, it is the responsibility of the customer, when utilizing Paceleader products, to comply with the standards of safety in making a safe design for entire system and to avoid situation in which a malfunction or failure., In developing a new designs, customer should ensure that the device which shown in this documents are used within specified operatingranges.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Paceleader for any infringements of patents or other rights of the third parties which may result from its use.