


➤ General Description

The PAE1565FB is the single array voltage-stabilized transistor voltage, it features high ESD, low leakage, fast response and excellent voltage clamping capability.

➤ FBP-02C

➤ Feature

- Single-channel ESD protection
- Provide ESD protection meeting
- IEC61000-4-2(ESD)
 - ±30 KV air discharge
 - ±30 KV contact discharge
- Low clamping voltage
- 5V low operating voltage
- Reliable silicon device avalanche breakdown structure
- Small Body Outline: 1.0 x 0.6 x 0.5-0.62mm



➤ Application

- Cell phone handsets and accessories
- Personal Digital Assistants (PDAs)
- Portable Instrumentation
- Digital Cameras

➤ **Maximum Ratings (T_A=25°C Unless otherwise specified)**


Parameter	Symbol	Typical	Unit
Maximum Peak Pulse Power (t _p = 8/20 μs)	P _{PP}	107	W
Maximum Peak Pulse Current (t _p = 8/20 μs)	I _{PP}	8.7	A
ESD Per IEC 61000-4-2 (Air) ESD Per IEC 61000-4-2 (Contact)	V _{PP}	±30 ±30	KV
Storage temperature range	T _{stg}	-55 ~ +150	°C
Operating temperature range	T _{op}	-55 ~ +125	°C

➤ **Electrical Characteristics (T_A=25°C Unless otherwise specified)**

Parameter	Symbol	Conditions	Min.	Typ	Max.	Unit
Reverse Working Voltage	V _{RWM}				5	V
Reverse Breakdown Voltage	V _{BR}	I _T = 1mA	6.2			V
Reverse Leakage Current	I _R	V _{RWM} = 5V			1	μA
Negative Clamping Voltage	V _{C1}	I _{PP} = 8.7A; t _p =8/20us			12.3	V
Junction Capacitance	C _{j2}	V _R =0V; f=1MHz; Any I/O pin to GND			65	pF

Electronics Parameter

Symbol	Parameter
V _{rwm}	Peak Reverse Working Voltage
I _r	Reverse Leakage Current @ V _{rwm}
V _{br}	Breakdown Voltage @ I _t
I _t	Test Current
I _{pp}	Maximum Reverse Peak Pulse Current
V _c	Clamping Voltage @ I _{pp}
P _{pk}	Peak Power Dissipation
C	Junction Capacitance
I _f	Forward Current
V _f	Forward Voltage @ I _f

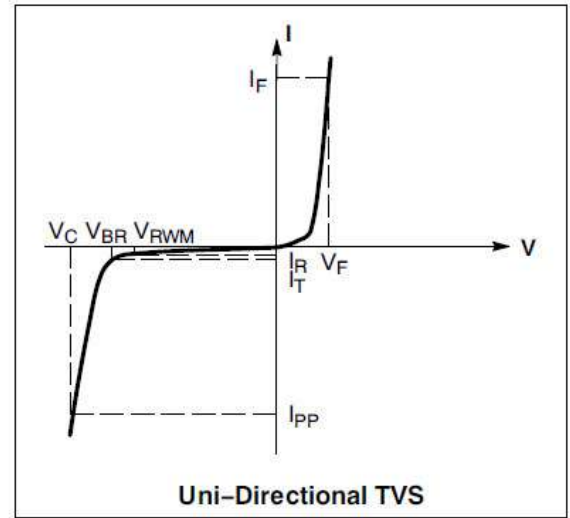

➤ Typical Characteristics

Fig.1. ESD clamp voltage
Positive 8KV IEC61000-4-2 contact discharge



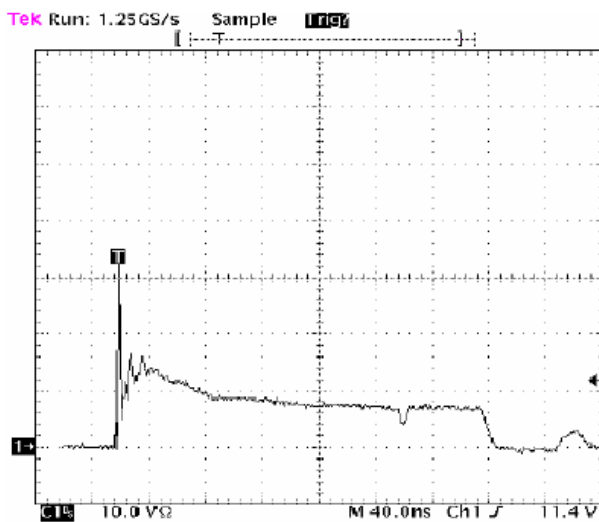


Fig.2. ESD clamp voltage
Negative 8KV IEC61000-4-2 contact discharge

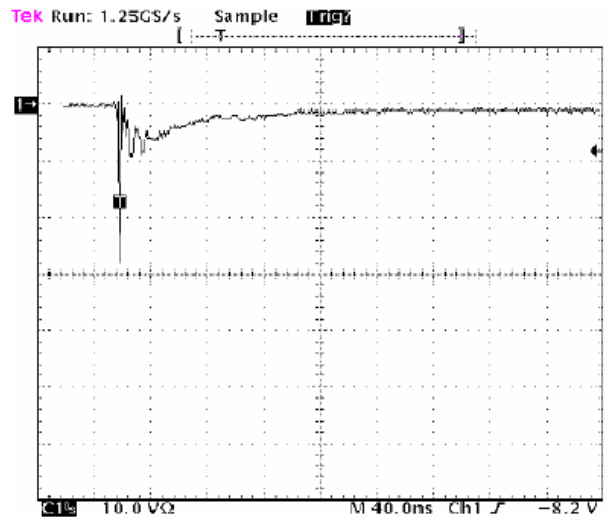

➤ Package Information (FBP-02C)

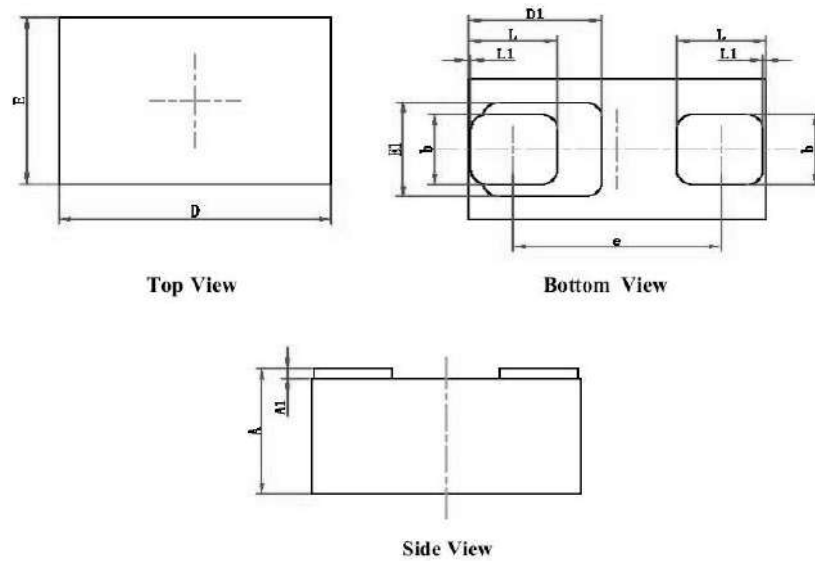

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.450	0.550	0.018	0.022
A1	0.010	0.070	0.000	0.003
D	0.95	1.050	0.037	0.011
E	0.550	0.650	0.022	0.026
D1	0.450REF		0.018REF	
E1	0.400REF		0.016REF	
b	0.275	0.325		0.013
e	0.675	0.725		0.029
L	0.275	0.325		0.013
L1	0.010REF		0.000REF	

➤ Ordering Information

Part Number	Description	Quantity
PAE1565FB	FBP-02C Reel	10000 pcs

DISCLAIMER

- The information in this document and any product described herein are subject to change without notice and should not be construed as a commitment by Paceleader, Paceleader reserve the right to make changes to the information in this document.
- Though Paceleader make effort to improve product quality and reliability, Product can malfunction and fail due to their inherent electrical sensitivity and vulnerability to physical stress, it is the responsibility of the customer, when utilizing Paceleader products, to comply with the standards of safety in making a safe design for entire system and to avoid situation in which a malfunction or failure., In developing a new designs, customer should ensure that the device which shown in this documents are used within specified operatingranges.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Paceleader for any infringements of patents or other rights of the third parties which may result from its use.