

➤ General Description

The PAE5V0D3R is designed to protect voltage sensitive components that require ultra-low capacitance from ESD and transient voltage events. Excellent clamping capability, low capacitance, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium. Because of its low capacitance, it is suited for use in high frequency designs such as USB 2.0 high speed and antenna line applications.

This series has been specifically designed to protect sensitive components which are connected to data and transmission lines from overvoltage caused by ESD(electrostatic discharge), and EFT (electrical fast transients).

➤ Feature


- Peak Power Dissipation – 40 W (8 x 20 us Waveform)
- Replacement for MLV (0805)
- Protects I/O Port
- Ultralow capacitance 0.5pf
- Low Clamping Voltage
- Low Leakage
- Response Time is < 1 ns
- Stand-off Voltage: 5.0 V
- RoHS Compliant
- Meets MSL 1 Requirements
- Solid-state silicon avalanche technology
- ROHS compliant
- Device Meets MSL 1 Requirements

➤ SOD-323



➤ Application

- RF antenna
- Cellular handsets and accessories
- Portable instrumentation
- Peripherals
- Serial and Parallel Ports
- Notebooks, Desktops, Servers
- Projection TV

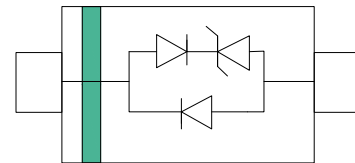

➤ Protection solution to meet

- IEC61000-4-2 (ESD) ±15kV (air), ±8kV (contact)
- IEC61000-4-4 (EFT) 40A (5/50ns)

➤ Maximum Ratings (TA=25°C Unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (tp=8/20μs waveform)	PPPP	40	Watts
ESD Rating per IEC61000-4-2:	Contact	8	KV
	Air	15	
Lead Soldering Temperature	TL	260 (10 sec.)	°C
Operating Temperature Range	TJ	-55 ~ 150	°C
Storage Temperature Range	TSTG	-55 ~ 150	°C
Lead Solder Temperature – Maximum (10 Second Duration)	TL	260	°C

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

*Other voltages may be available upon request.


1. Nonrepetitive current pulse, per Figure 1.

➤ Electrical Characteristics (TA=25°C Unless otherwise specified)


Device	VRWM	IR @ VRWM	VBR @ 1 mA	VC		Capacitance	
			(Volts)	@ 1 A	@ 3 A	@ VR = 0 V, 1 MHz (pF)	
	(V)	(uA)	Min	Max (V)		Typ	Max
PAE5V0D3R	5.0	1	6.0	9.8	15	0.35	0.55

Junction capacitance is measured in VR=0V, F=1MHz


Symbol	Parameter
VRWM	Working Peak Reverse Voltage
VBR	Breakdown Voltage @ IT
VC	Clamping Voltage @ IPP
IT	Test Current
IRM	Leakage current at VRWM
IPP	Peak pulse current
CO	Off-state Capacitance
CJ	Junction Capacitance

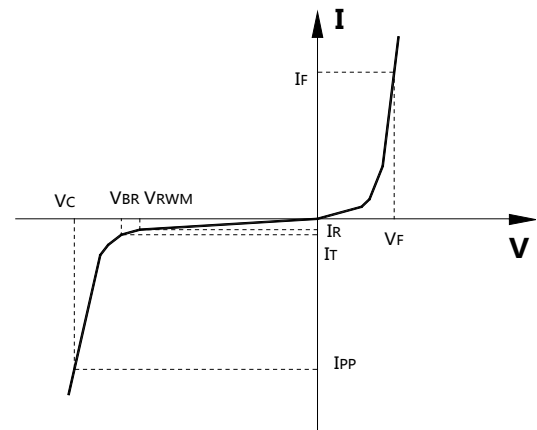


➤ Typical Characteristics

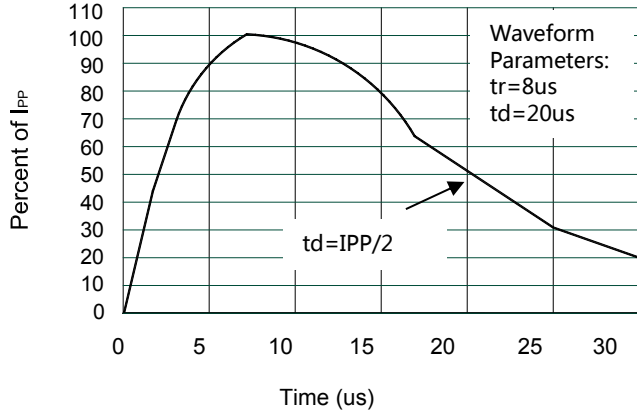


Pulse Waveform

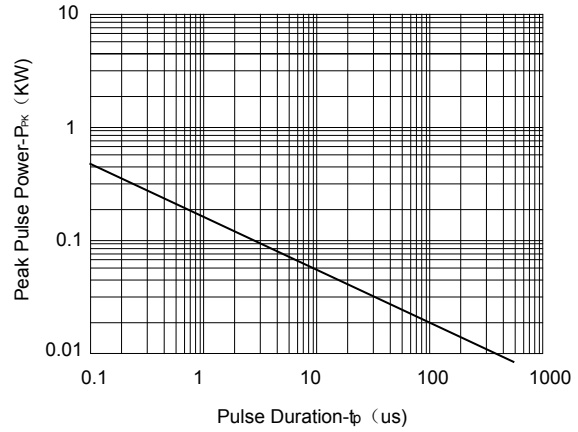

Non-Repetitive Peak Pulse Power vs. Pulse Time

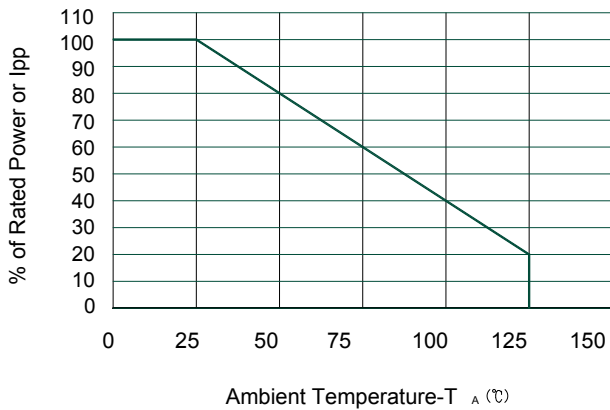

Power Derating Curve

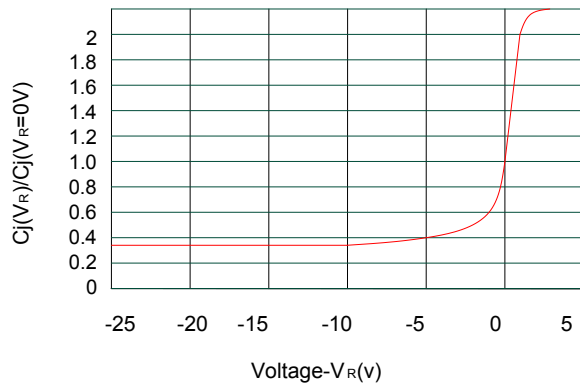


Junction Capacitance vs. Reverse Voltage

➤ Ordering Information

Part Number	Description	Quantity
PAE5V0D3R	SOD-323 Reel	3000 pcs


➤ Package Information (SOD-323)

Case Material: Molded Plastic. UL Flammability

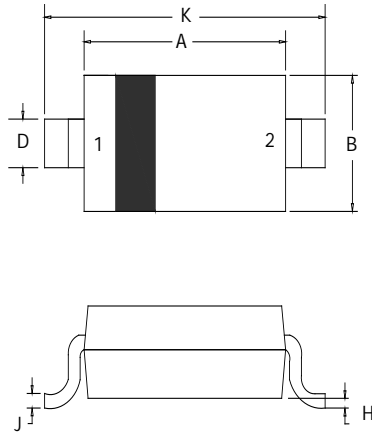


Dim	Millimeters		Inches	
	Min	Max	Min	Max
A	1.60	1.80	0.063	0.071
B	1.2	1.40	0.047	0.055
C	0.80	0.90	0.031	0.035
D	0.25	0.35	0.010	0.014
E	0.15REF		0.006REF	
H	0	0.10	0	0.004
J	0.08	0.15	0.003	0.006
K	2.50	2.70	0.098	0.106

Recommended Pad outline

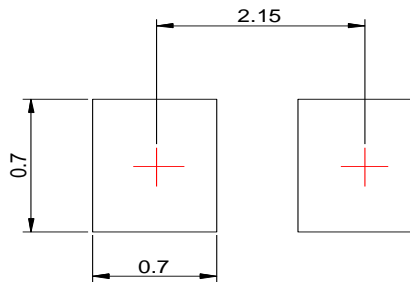

SOD-323 Reel Dim

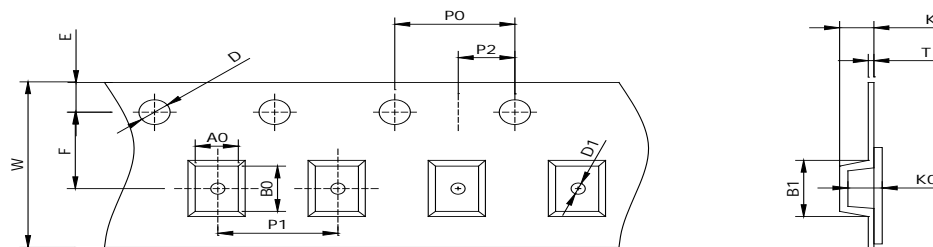

Package	Chip Size	Pocket Size B0×A0×K0(mm)	Tape Width	Reel Diameter	Quantity Per Reel	P0	P1
SOD-323	2.60×1.40×1.05	3.30×1.50×1.25	8mm	178mm(7")	3000	4mm	4mm
D0	D1	E	F	K	T	W	
1.5mm	0.5mm	1.75mm	3.5mm	1.0mm	0.2mm	8mm	

DISCLAIMER

- The information in this document and any product described herein are subject to change without notice and should not be construed as a commitment by Paceleader, Paceleader reserve the right to make changes to the information in this document.
- Though Paceleader make effort to improve product quality and reliability, Product can malfunction and fail due to their inherent electrical sensitivity and vulnerability to physical stress, it is the responsibility of the customer, when utilizing Paceleader products, to comply with the standards of safety in making a safe design for entire system and to avoid situation in which a malfunction or failure., In developing a new designs, customer should ensure that the device which shown in this documents are used within specified operatingranges.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by Paceleader for any infringements of patents or other rights of the third parties which may result from its use.